


STRADA-2X2-SCL

Type II/III (long) beam for very wide pole to pole distances. Ideal for pedestrian paths and residential roads. EN13201 P-classes.


TECHNICAL SPECIFICATIONS:

Dimensions	50 mm
Height	7.8 mm
Fastening	screw, pin
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	8.3 kg
Quantity in Box	800 pcs
ROHS compliant	yes ⓘ

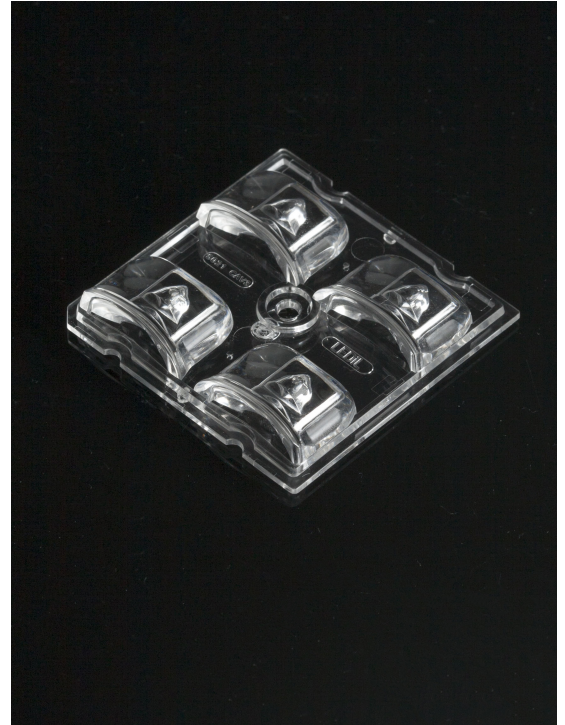

MATERIAL SPECIFICATIONS:



Component	Type	Material	Colour
STRADA-2X2-SCL	Lens	PMMA	clear

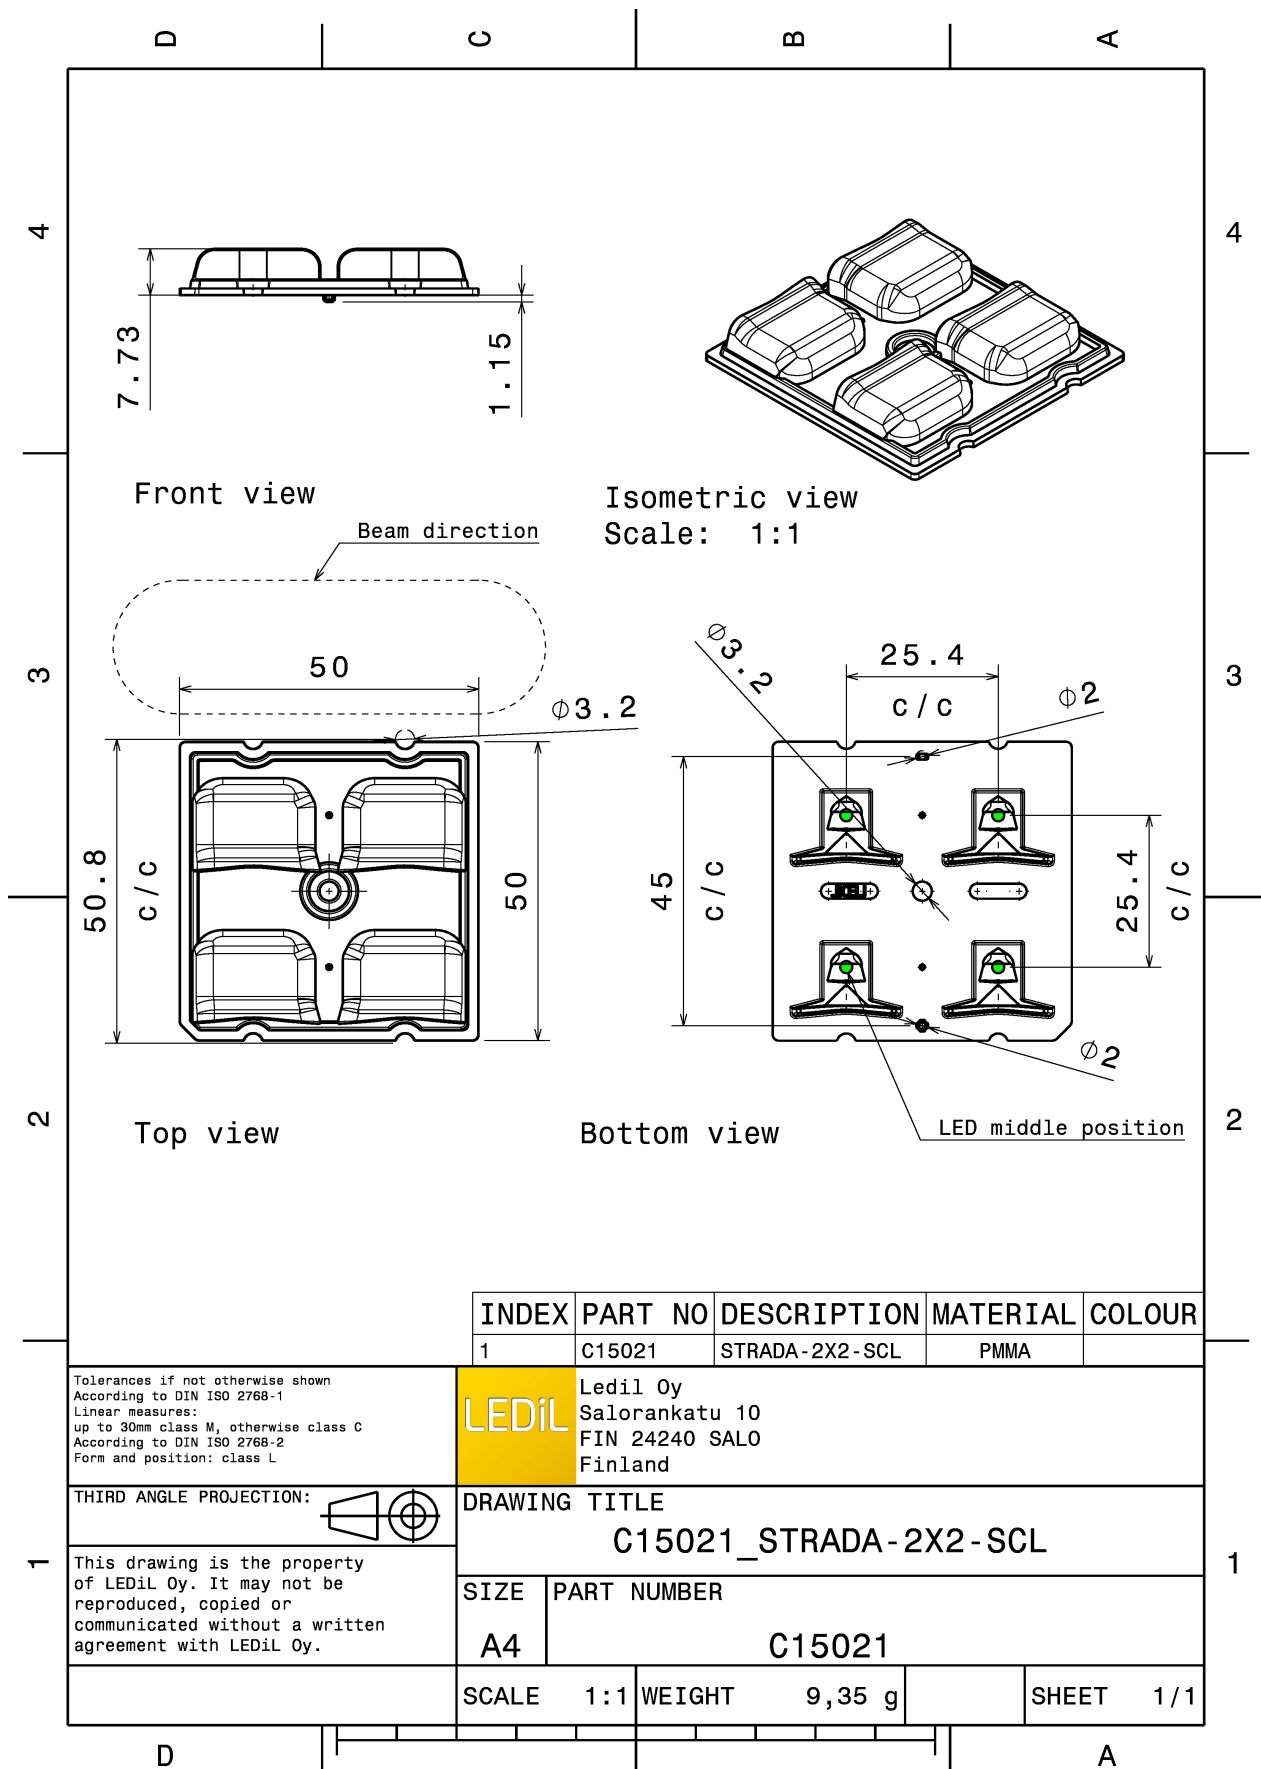


PHOTOMETRIC DATA (MEASURED):




LED SMD 5050
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.630 cd/lm
Required components:

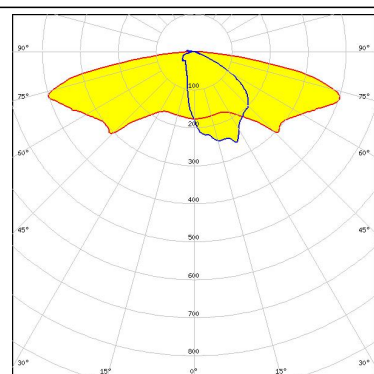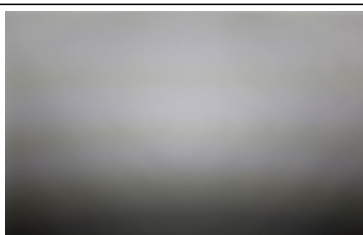


LED QUICK FLUX XTP 2x4 xxx LS G5
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.000 cd/lm
Required components:

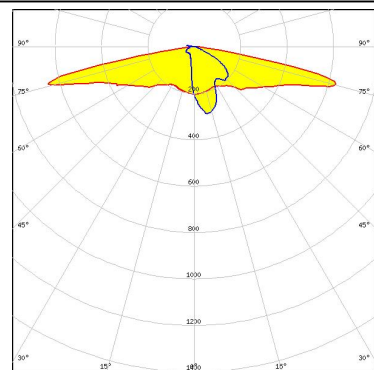

LED QUICK FLUX XTP 2x6 xxx LS G5
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.000 cd/lm
Required components:

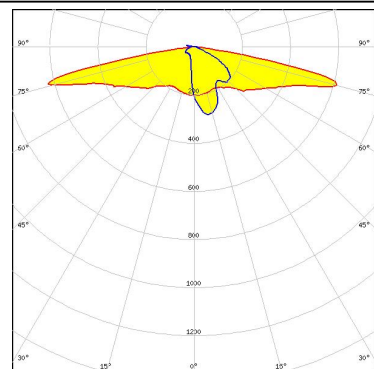


LED QUICK FLUX XTP 2x8 xxx LS G5
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.000 cd/lm
Required components:

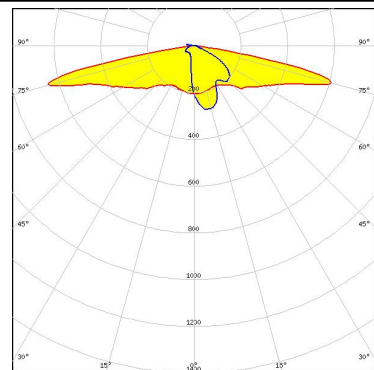



PHOTOMETRIC DATA (MEASURED):




LED XD16
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.100 cd/lm
Required components:

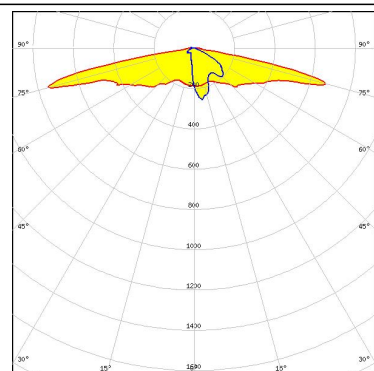


LED XD16 2x2 cluster
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.750 cd/lm
Required components:

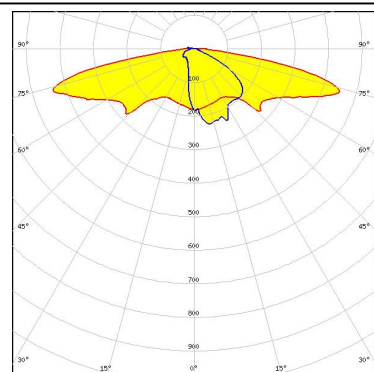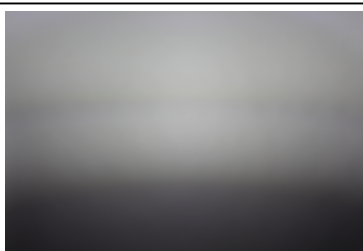

LED XP-G2
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.200 cd/lm
Required components:

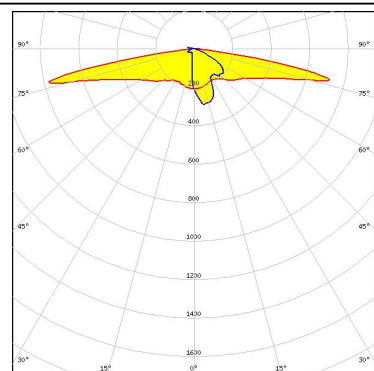

LED XP-L
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.900 cd/lm
Required components:

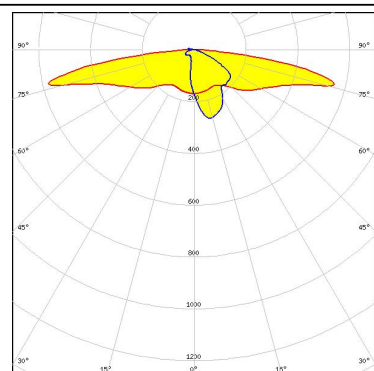


PHOTOMETRIC DATA (MEASURED):




LED XP-L
FWHM Asymmetric
Efficiency 78 %
Peak intensity 0.550 cd/lm
Required components:


Undefined Manufacturer: Protective Plate, Glass

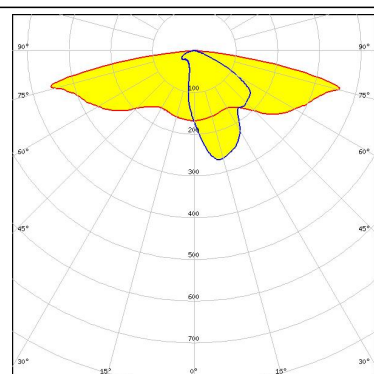


LED XP-L2
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.750 cd/lm
Required components:

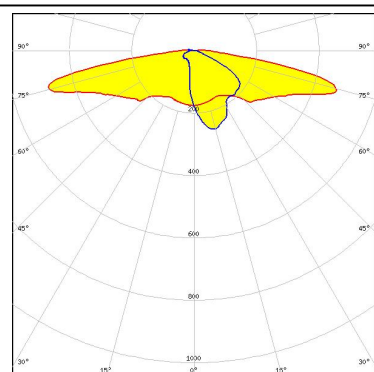

LED H35C1 (LEMWA33)
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.100 cd/lm
Required components:

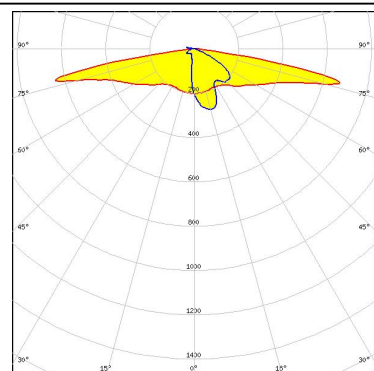


LED LUXEON 5050
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.660 cd/lm
Required components:

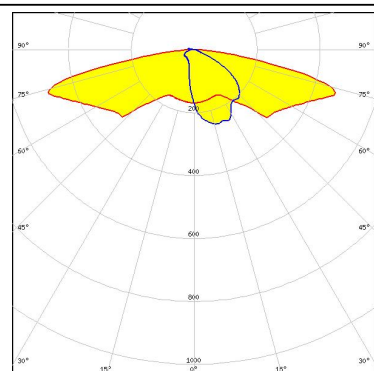


PHOTOMETRIC DATA (MEASURED):





LED LUXEON TX
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.040 cd/lm
Required components:

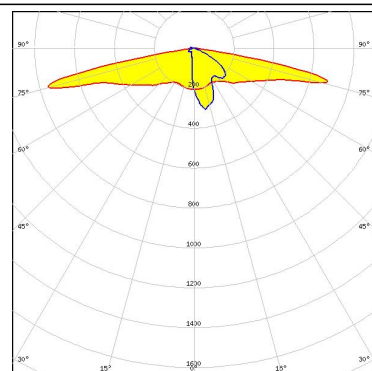


LED LUXEON V
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.800 cd/lm
Required components:

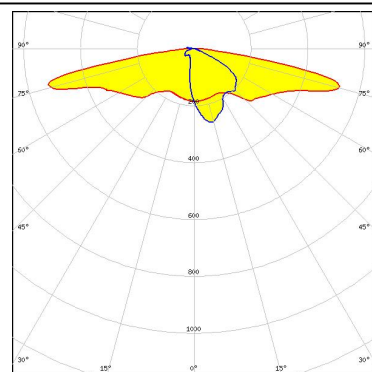

LED NVSW3x9A
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.930 cd/lm
Required components:

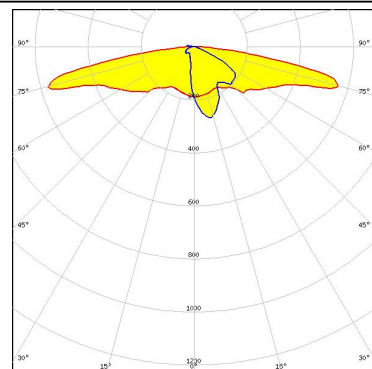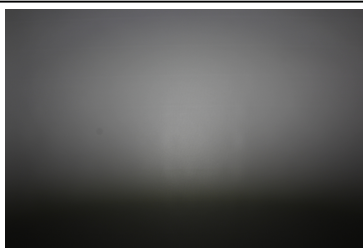


LED NVSxE21A
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.380 cd/lm
Required components:

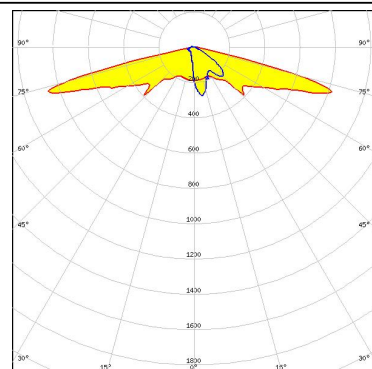

PHOTOMETRIC DATA (MEASURED):


OSRAM

LED PrevaLED Brick DC 2x8
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.100 cd/lm
Required components:

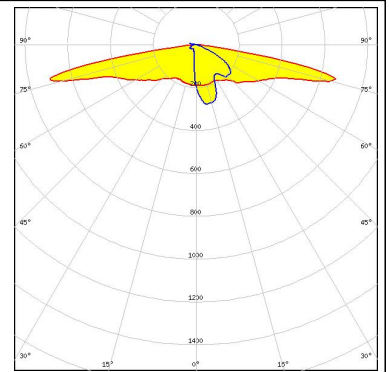


OSRAM

LED Oslon Square Gen3
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.100 cd/lm
Required components:

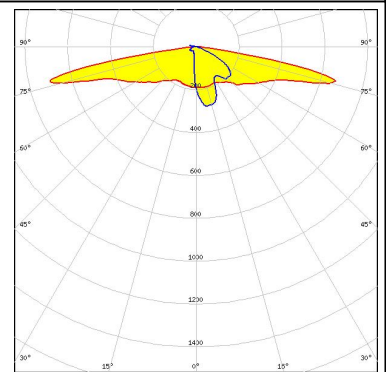


OSRAM

LED Oslon Square PC
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.900 cd/lm
Required components:

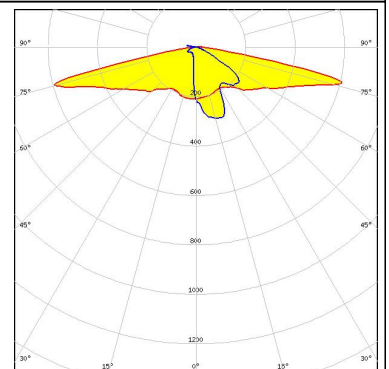

PHILIPS


LED Fortimo FastFlex LED board 2x8 DA G4
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.000 cd/lm
Required components:

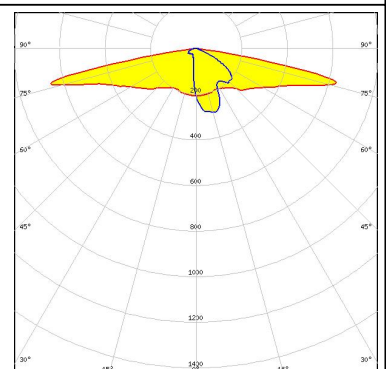

PHOTOMETRIC DATA (MEASURED):


SAMSUNG

LED LH351B
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.860 cd/lm
Required components:

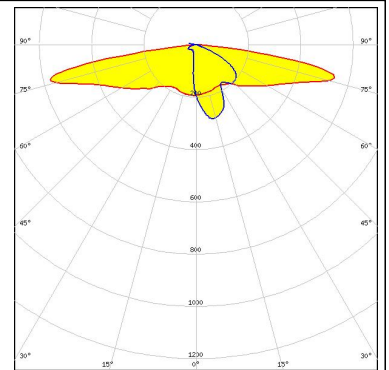


SAMSUNG

LED LH351C
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.900 cd/lm
Required components:

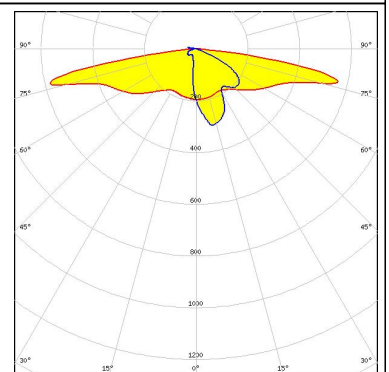


SAMSUNG

LED LH351D
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.740 cd/lm
Required components:

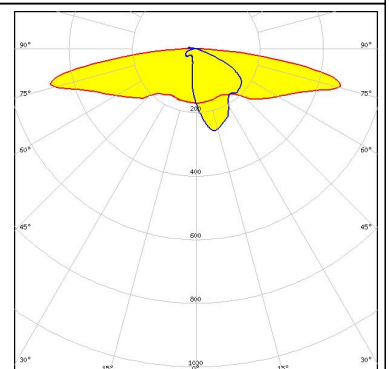

SAMSUNG


LED LH508A
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.700 cd/lm
Required components:

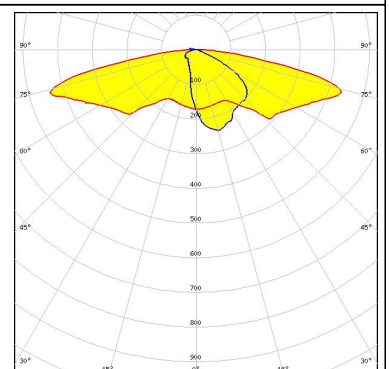


PHOTOMETRIC DATA (MEASURED):



LED Z8Y22
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.870 cd/lm
Required components:

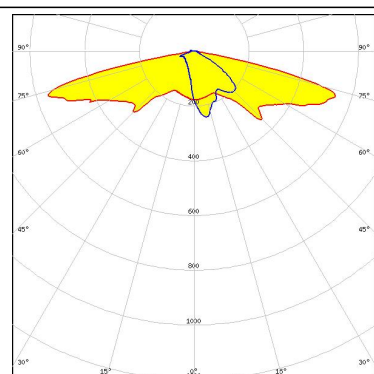


LED Z8Y22P
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.960 cd/lm
Required components:

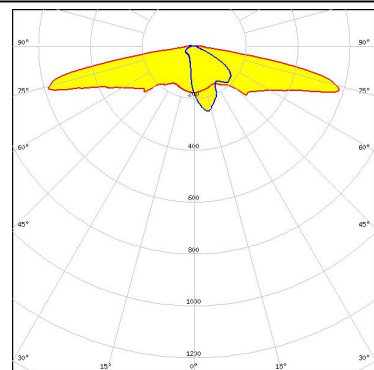


TRIDONIC

LED RLE G1 49x121mm 2000lm xxx EXC OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.900 cd/lm
Required components:

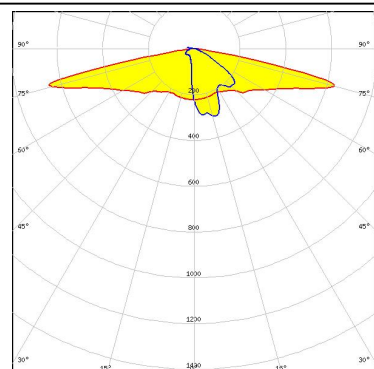

TRIDONIC


LED RLE G1 49x133mm 2000lm xxx EXC OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.900 cd/lm
Required components:

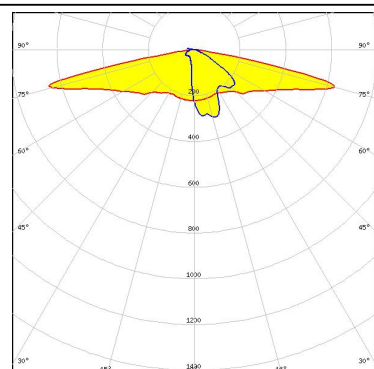

PHOTOMETRIC DATA (MEASURED):


TRIDONIC

LED RLE G1 49x223mm 4000lm xxx EXC OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.900 cd/lm
Required components:

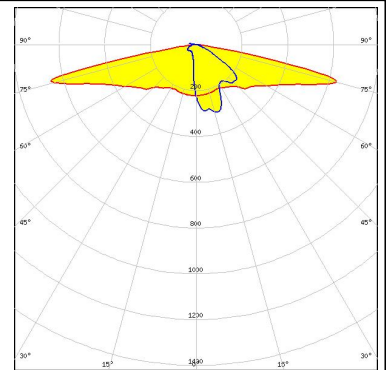

TRIDONIC


LED RLE G1 49x245mm 4000lm xxx EXC OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.900 cd/lm
Required components:

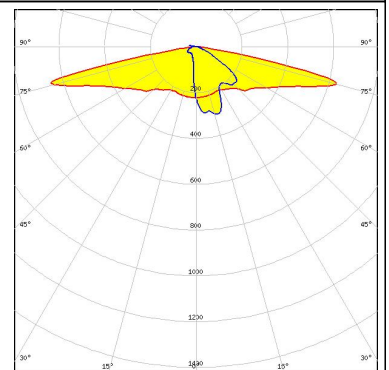


PHOTOMETRIC DATA (SIMULATED):




LED XB-H
FWHM Asymmetric
Efficiency %
Peak intensity cd/Im
Required components:

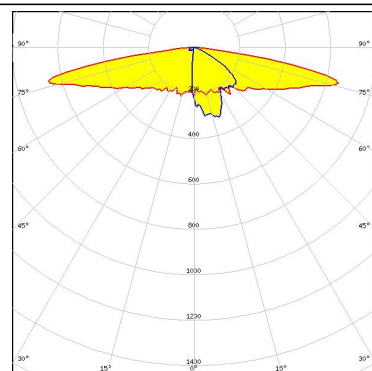


LED XHP35 HD
FWHM Asymmetric
Efficiency %
Peak intensity cd/Im
Required components:

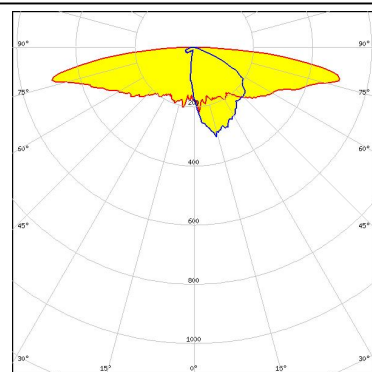

LED XM-L2
FWHM Asymmetric
Efficiency %
Peak intensity cd/Im
Required components:

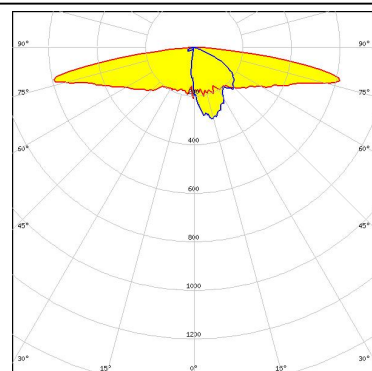


LED XP-E2
FWHM Asymmetric
Efficiency 91 %
Peak intensity 0.660 cd/Im
Required components:

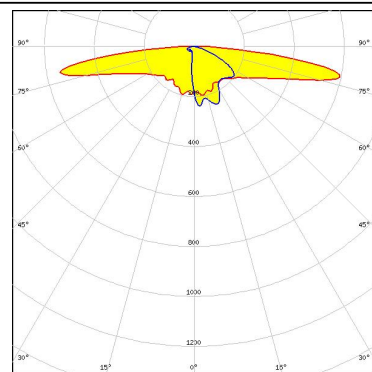


PHOTOMETRIC DATA (SIMULATED):




LED XP-G3
FWHM Asymmetric
Efficiency 90 %
Peak intensity 0.760 cd/lm
Required components:

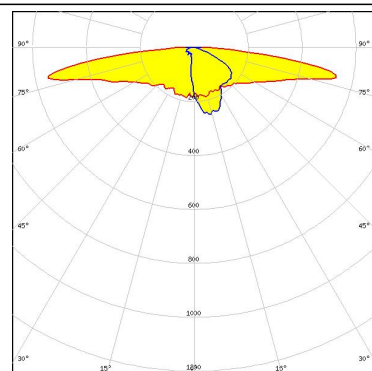


LED XP-L HI
FWHM Asymmetric
Efficiency %
Peak intensity cd/lm
Required components:

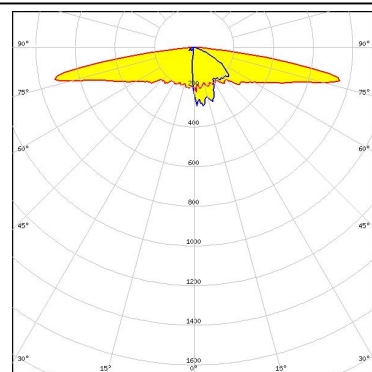

LED XT-E
FWHM Asymmetric
Efficiency %
Peak intensity cd/lm
Required components:

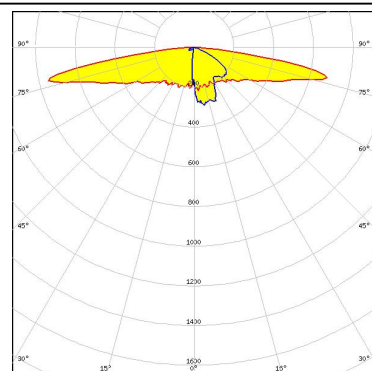


LED H35C1 (LEMWA33)
FWHM Asymmetric
Efficiency 91 %
Peak intensity 0.740 cd/lm
Required components:

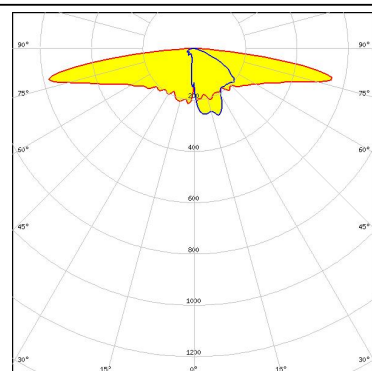


PHOTOMETRIC DATA (SIMULATED):




LED LUXEON 5258
 FWHM Asymmetric
 Efficiency %
 Peak intensity cd/lm
 Required components:

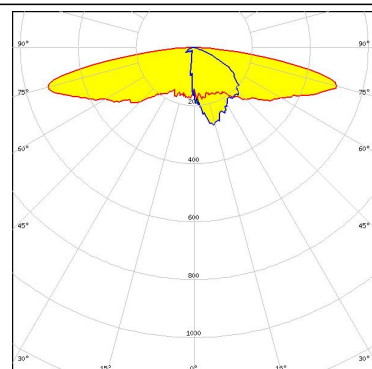


LED NVSW219D
 FWHM Asymmetric
 Efficiency 91 %
 Peak intensity 0.660 cd/lm
 Required components:

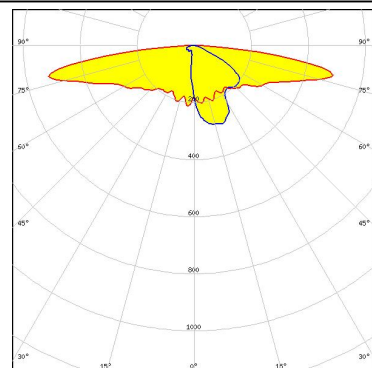

LED NVSxx19B/NVSxx19C
 FWHM Asymmetric
 Efficiency 87 %
 Peak intensity 0.830 cd/lm
 Required components:

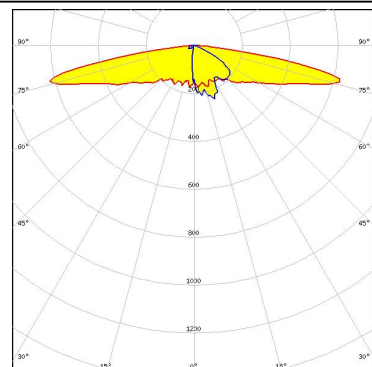

LED NVSxx19B/NVSxx19C
 FWHM Asymmetric
 Efficiency 69 %
 Peak intensity 0.510 cd/lm
 Required components:

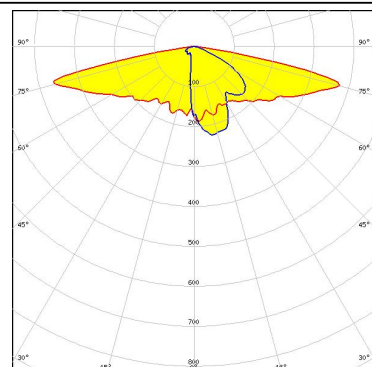

Undefined Manufacturer: Protective Plate, Glass

PHOTOMETRIC DATA (SIMULATED):

OSRAM


Opto Semiconductors

LED Duris S8
 FWHM Asymmetric
 Efficiency 76 %
 Peak intensity 0.440 cd/lm
 Required components:
 Undefined Manufacturer: Protective Plate, Glass

OSRAM

Opto Semiconductors


LED Duris S8
 FWHM Asymmetric
 Efficiency 92 %
 Peak intensity 0.620 cd/lm
 Required components:

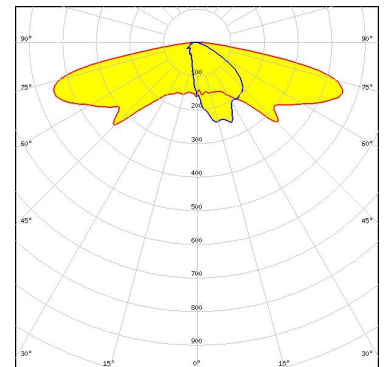

OSRAM


Opto Semiconductors

LED OSCONIQ P 3737 (3W version)
 FWHM Asymmetric
 Efficiency 91 %
 Peak intensity 0.710 cd/lm
 Required components:

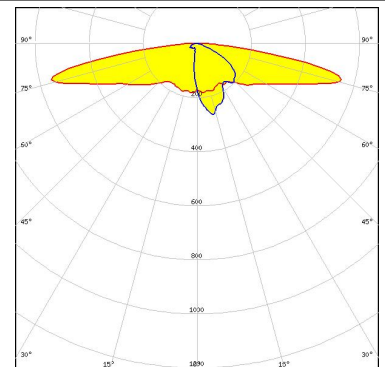

PHILIPS


LED Fortimo FastFlex LED board 2x8 DAX G4
 FWHM Asymmetric
 Efficiency 90 %
 Peak intensity 0.760 cd/lm
 Required components:

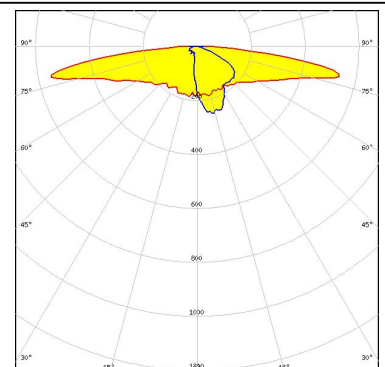

PHOTOMETRIC DATA (SIMULATED):


SAMSUNG

LED LH181B
FWHM Asymmetric
Efficiency 92 %
Peak intensity 0.830 cd/lm
Required components:

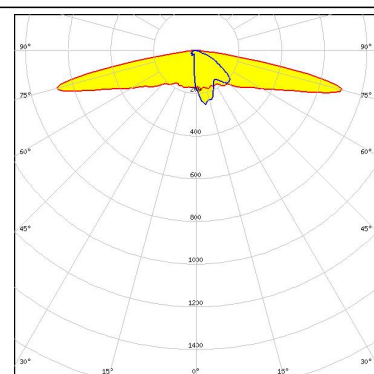

SEOUL SEMICONDUCTOR


LED Z5M1/Z5M2
FWHM Asymmetric
Efficiency %
Peak intensity cd/lm
Required components:

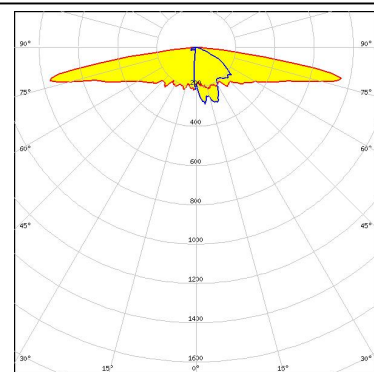

TOSHIBA

Leading Innovation >>>

LED TL1L4
FWHM Asymmetric
Efficiency %
Peak intensity cd/lm
Required components:

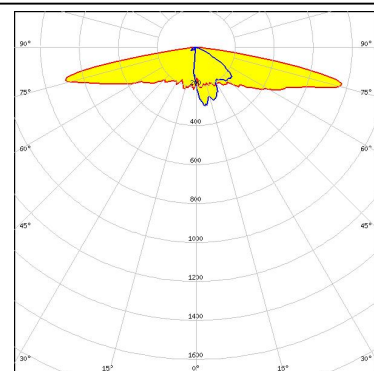

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)