客户料号：

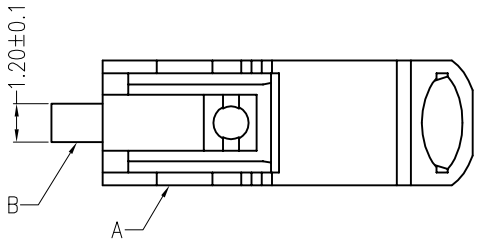



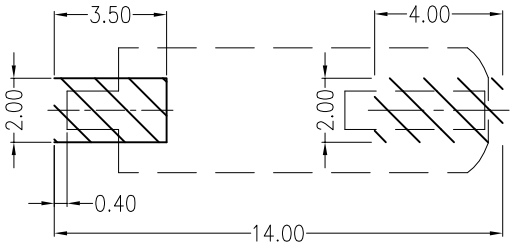

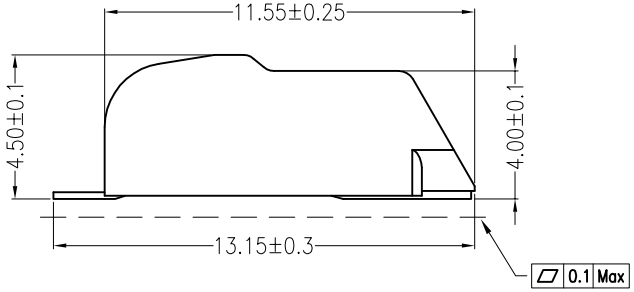

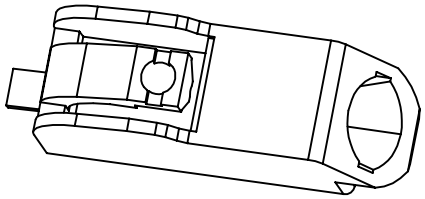

Board Layout

主要技术参数 Main Specifications

线　　数 (Poles): 01 to 03P
接触电阻 (Contact resistance):≤20mΩ
绝缘电阻 (Insulation resistance):≥800MΩ
额定电压 (Rated voltage):250V AC DC
额定电流 (Rated current):6.0A AC DC
耐 电 压 (Withstand Voltage): 800V AC/minute
温度范围 (Temperature Range) :-25℃～ +105℃

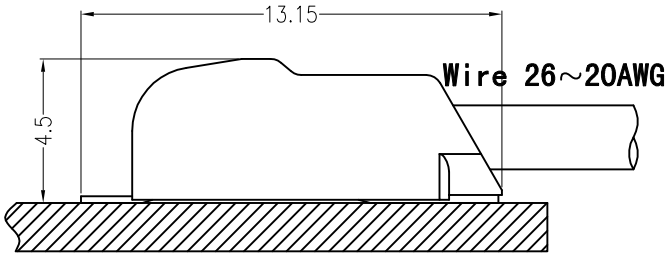

Installation drawing

GOOSVN

MODEL NO: GSL45-01P

MODEL NAME: 4.0mmPITCH 90° WAFER SMT TYPE

APPROVED BY		UNIT	TOLERANCE	REV	EC#.NO	REVISON RECORD	NAME	DATE
邵敬和		mm	X.X ±0.30	A/0		NEW RELEASE	张一荣	2014.03.18
CHECKED BY		SCALE	X.XX ±0.20	A/1		更换图框	李 润	2016.05.04
伏 何		FULL	X.XXX ±0.10					
DRAWN BY	DATE	SHEET	ANGLE					
李 润	2014.03.18	1/1	X° ±3.0°					

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
A	Insulator	1	LCP(UL94V-0)	Beige
B	Contacts	1	PhosphorBronze	Tin-plated
C				