


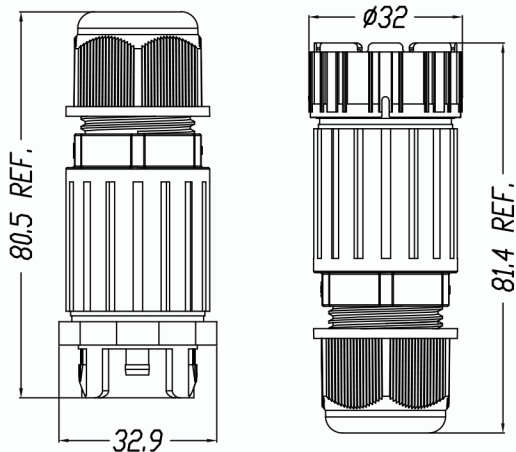

产品参数 Specifications

芯数 Number of Poles	 2Pin	 3Pin	 4Pin	 5Pin	 6Pin
额定电压 Rated Voltage	450V	450V	450V	450V	450V
额定电流 Rated Current	50A	50A	50A	20A	20A
接线范围 Wire Section	0.5-6.0mm ²			0.5-2.5mm ²	
外线直径 Outer Cable Diameter	5-9 mm,9-12 mm,10-14 mm				
可插拔次数 Mating Cycle	1500 Mating Cycles				
环境温度 Temperature Range	-40℃-+105℃				
防水等级 IP Code	IP68				
外壳材质 Housing Materials	PA66				
端子材质 Contact/Terminal Material	铜合金 Copper Alloy				

产品料号 Part No

Pin位分布 Number of Poles	料号 Part No.
2Pin	EW-M28MF-02X01
3Pin	EW-M28MF-03X01
4Pin	EW-M28MF-04X01
5Pin	EW-M28MF-05X01
6Pin	EW-M28MF-06X01
此产品芯数接受定制 The number of poles can be customized	

安装说明 Installation Instruction

