


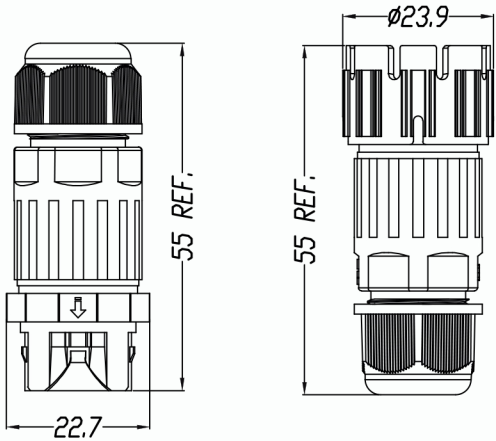

产品参数 Specifications

芯数 Number of Poles	 2Pin	 3Pin	 4Pin	 5Pin
额定电压 Rated Voltage	450V	450V	450V	450V
额定电流 Rated Current	20A	20A	16A	16A
接线范围 Wire Section	0.5-2.5mm ²		0.5-1.5mm ²	
外线直径 Outer Cable Diameter	3.5-7mm,5-8mm,7-10mm			
可插拨次数 Mating Cycle	1500 Mating Cycles			
环境温度 Temperature Range	-40℃-+105℃			
防水等级 IP Code	IP68			
外壳材质 Housing Materials	PA66			
端子材质 Contact/Terminal Material	铜合金 Copper Alloy			

产品料号 Part No

Pin位分布 Number of Poles	料号 Part No.
2Pin	EW-M19MF-02X01
3Pin	EW-M19MF-03X01
4Pin	EW-M19MF-04X01
5Pin	EW-M19MF-05X01
此产品芯数接受定制 The number of poles can be customized	

安装说明 Installation Instruction

