


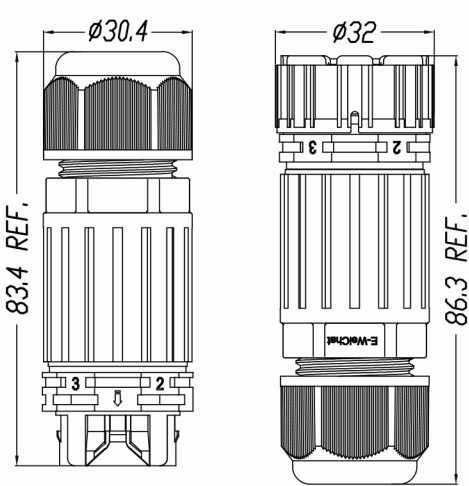

产品参数 Specifications

芯数 Number of Poles	 4Pin	 5Pin
额定电压 Rated Voltage	450V	450V
额定电流 Rated Current	16A	16A
接线范围 Wire Section	0.5-2.5mm ²	
外线直径 Outer Cable Diameter	5-9mm, 9-12mm, 10-14mm	
可插拨次数 Mating Cycle	1500 Mating Cycles	
环境温度 Temperature Range	-40°C-+105°C	
防水等级 IP Code	IP68	
外壳材质 Housing Materials	PA66	
端子材质 Contact/Terminal Material	铜合金 Copper Alloy	

产品料号 Part No

Pin位分布 Number of Poles	料号 Part No.
4Pin	EW-P25MF-04301
5Pin	EW-P25MF-05301
此产品芯数接受定制 The number of poles can be customized	

安装说明 Installation Instruction

